


Diamond Single Sided NBR Foam Tape

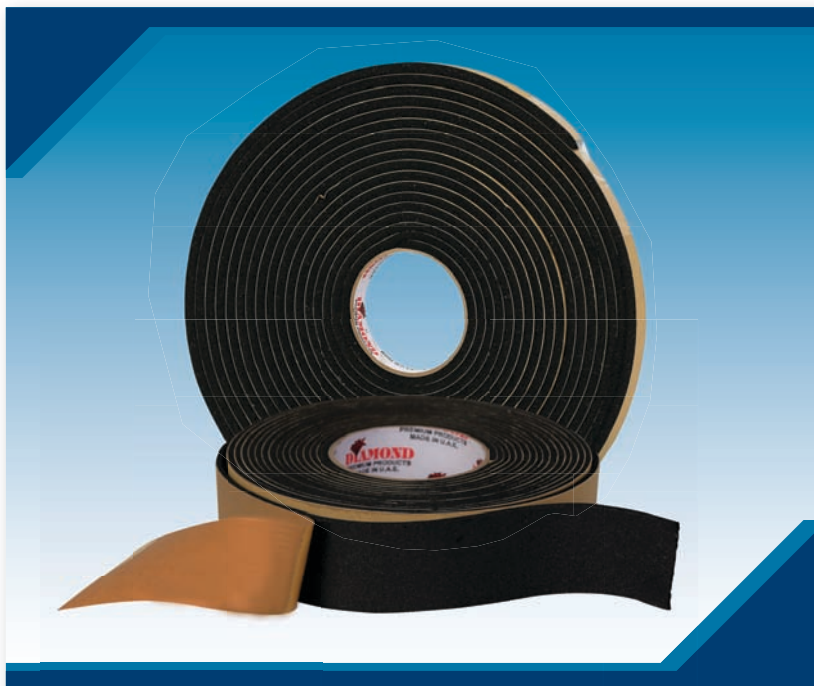

Diamond single sided NBR Foam gasket tape has a moderately strong Solvent acrylic adhesive, and carried on Brown siliconized release paper. The tape has excellent flexibility and suitable for thermal insulation & duct Gasket purpose.

Features:

- Best result obtained when it's applied to clean and dry surfaces
- Low moisture content of these products makes these tapes as a good sealant

Applications:

- Diamond S/s NBR Foam tape is ideal for hot or cold piping and fittings. Due to high flexibility and conformability this tape is used in insulation purpose
- Diamond S/s NBR Foam tape flexible, light-weight, Nitrile foam for quality insulation for refrigeration, air conditioning and other applications
- Sealing electrical enclosures and switch cabinets
- Sealing exterior and interior lighting, sealing industrial access doors and hatches
- This tape is suitable for cushioning air, water and dust seals gap-filling surface protection gasket production anti-vibration



Product Specification:

Properties	Specification	ASTM Test Method
Backing Thickness	3 +/- 1 mm 6 +/- 1.5 mm	D-3652
Adhesion To Steel	800-1000 gms/inch	D-3330
Tensile Strength	1700-2500 gms/inch	D-3759
Elongation at Break	155%	D-3759
Density	60-70 kg/m ³	D-1667
Temperature Limits	-5°C to + 100° C	

Storage:

Storage under normal room temperature and 50% RH in the original packing

Shelf Life:

Use within 12 months.

Packing:

Backing	Adhesive	Color	Liner	Standard Sizes		
				W(mm)	L(M)	Rolls/Box
NBR Closed Foam	Solvent/Acrylic	Black	Brown release Paper	24	7.5/10	80/20
				48	7.5/20	40/10

Custom sizes can be produced as per customer specifications.

Note: The values and the figures provided above are results of tests and subject to variations. Users are to determine the suitability of our products.